

SWISH
LAMINATE FLOORING
BESPOKE

PRODUCT STRUCTURE

LAMINATE FLOORING

Liquid Overlay

The surface wear layer protects against scratches, scuffs and stains for along-lasting new floor look and performance. It can be appropriate for all residential/light commercial areas.

Decor Paper

Designer-inspired visuals create a true-to-nature appearance.

Highly Water-resistant HDF Core

Prevents telegraphing of minor subfloor imperfections. Impact resistance and more substantial feel is optimum in sound absorption. Superior dimensional stability with exclusive composition.

Balance Layer

Provides balance on dimensional stability and moisture resistance.

Thanks to its slim but extra outstanding physical properties, 4D Laminate Flooring creates endless possibilities for new generation flooring design and development.



KITCHENS



BATHROOMS



LAUNDRY ROOMS



OFFICES



RESTAURANTS



SHOPS

PRODUCT SPECIFICATION

LAMINATE FLOORING

| | |
|--------------|------------|
| Length | 1518mm |
| Width | 236mm |
| Thickness | 12mm |
| Installation | valinge 2G |
| Texture | 4D |

· With an innovative core, the 4D laminate collection enjoys much higher resistance against water.

· Surface Guard adopts ultimate strong surfaces with abrasion rating of AC4

· 4D Texture imparts a perfect natural glow to floors and highlights the ground.




4D EIR texture for one-stop beauty




Ultra resistance to daily abuse of liquid



Super anti-scratch for a worry-free daily life

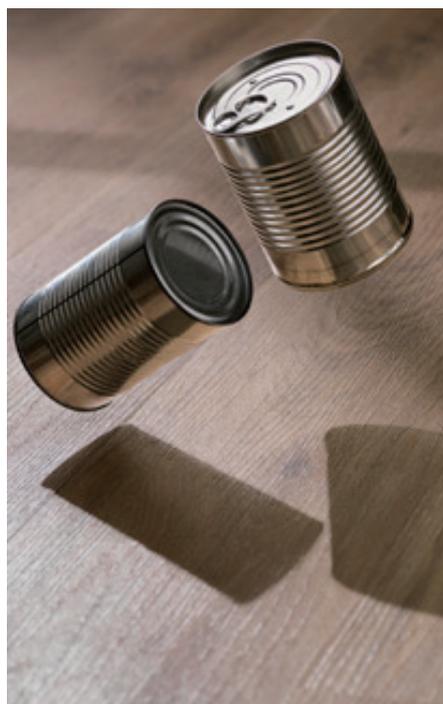

Incredible resistance to impacts

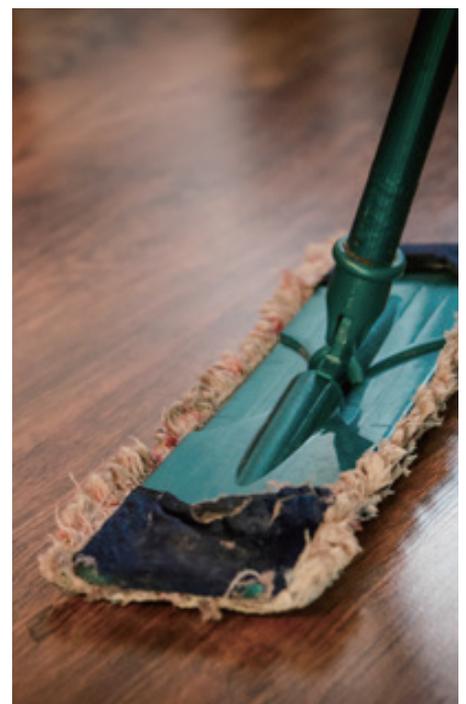


Wet Mops and sanitizers friendly

INSTALLATION

LAMINATE FLOORING

| Applications | Suitable |
|-----------------------------|----------|
| Dry & Level-Interior floor | ✓ |
| Wet & Level -Interior floor | ✓ |
| Saunas rooms | × |
| Exterior areas | × |

Pattern recommendation

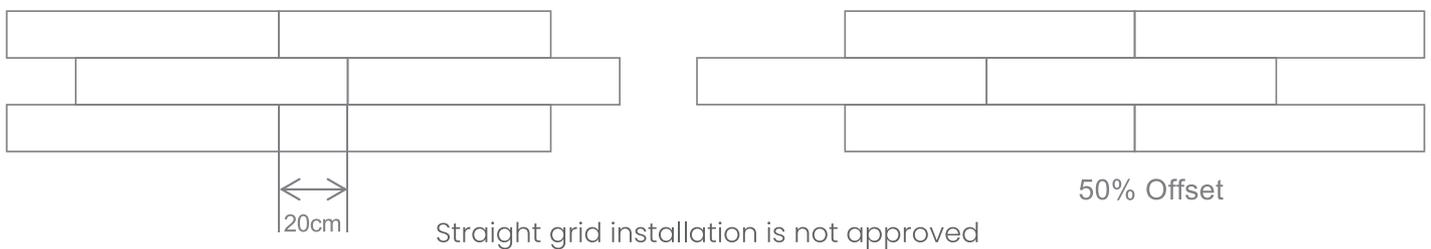

Note:

On a concrete slab, 200 UM plastic sheeting should be installed under 4D Laminate Flooring to avoid moisture ingress and mould.

When installing the 4D laminate floors, an extra 5~10% cutting allowance is required both for the installation and any potential future repairs inspect all flooring for damage before and throughout installation in optimal lighting. Do not install flooring with visible defects. Avoid long-lasting exposure to direct sunlight and excessive temperatures.

NUTMEG SLB-01



MAGNOLIA SLB-02



EGGSHELL SLB-03



VELVET SLB-04



VIVID SLB-05



FAWN SLB-06



LINDEN SLB-07



FLORIA SLB-08



SYDNEY GUM SLB-09



BLACKBUTT LIGHT SLB-10



NEW ENGLAND BLACKBUTT SLB-13



JARRAH SLB-14





4D LAMINATE FLOORING

| | |
|------------------------------|---|
| Plank Size | 1518 x236 x 12MM |
| Edge Profile | MICRO PAINTED BEVEL |
| Edge Wax | WATERPROOF WAX |
| Installation | VALINGE 2G FLOATING LOCKING SYSTEMS |
| Phtalate Free | CARB II |
| Fire Behavior | B fl-s1 |
| Indoor Air Quality | FLOOR SCORE |
| Recyclable | 100% |
| Dimensional Stability | ASTM F2199-20, PASS |
| Static Bending | ASTM D1037-12, PASS |
| Surface Bonding | NALFA LF 01-2019, 1.83N/nm ² |
| Large Ball Impact Resistance | NALFA LF 01-2019, NO CRACK |
| Small Ball Impact Resistance | NALFA LF 01-2019, NO CRACK |
| Micro-scratch Resistance | EN 16094,ABSOLUTE GLOSS CHANGE AVERAGE 0.4 |
| Abrasion Resistance | EN13229 AC4 (≥ 4000 Umdr.) |
| In floor heating | IN SLAB, RADIANT HEAT ONLY (MAX 28°C) |
| Limited warranty | 25 YEARS RESIDENTIAL AND 5 YEARS LIGHT COMMERCIAL |
| Packaging | 5 |
| Coverage:Sqm/box | 1.791 |
| Box Weight | 18.50KGS |
| Mouldings | SCOTIA, FLUSH STAIR NOSING, |





ECO FLOORING SYSTEMS

www.ecoflooring.com.au